



GRESHAM



# SYSTEM STORAGE

PRODUCT DATA SPECIFICATION



GRESHAM

# HINGED DOOR & OPEN UNITS

## PRODUCT DATA SPECIFICATION

A range of storage cupboards with provision for a range of adjustable accessories.

### Material

Top panel 25mm thick Melamine faced chipboard. Tops are edged all around with 2mm thick impact resistant ABS.

Carcase 18mm thick Melamine faced chipboard edged with 1mm thick impact resistant ABS.

Ladder track is manufactured from mild steel and allows internal accessories such as shelves to be positioned as required by the end user.

### Considerations

- Offered in a range of heights.
- Available as an open unit or with locking doors.
- Optional accessories available including shelves, Filing frames and pull out shelves.
- Units are locking the lock is part of a suited system that has over 250 differs, can be supplied with a master key or can be keyed alike. Supplied with two keys; one of which has a collapsible fob.
- Optional extended tops available to match desks and pedestals.
- Wardrobe conversion kit available for 1607mm to 2207 high units. Including shelves divider and coat rail (NOTE will not fit vertical tambour units).
- Supplied with adjustable feet to allow units to be levelled.
- A range of handle styles available.

### Accessories




CSLF  
Combi shelf



ROSF  
Roll out suspension frame




ROD  
Roll out drawer



ROSD  
Roll out slotted drawer with 5 dividers



ASM  
Adjustable slotted metal shelf with 5 dividers



ALFR  
Adjustable lateral filing rail



MROS  
Metal roll out shelf



AWSZ  
Adjustable shelf. 25mm thick MFC




AMS  
Adjustable shelf - Metal




WSHZ  
Wooden hat shelf & coat rail. 25mm thick MFC

Square edge



Certification



Environment



Quality



100% Recyclable



Surface



Guarantee




Dimensions


For full details see capacities

# HINGED DOOR & OPEN UNITS

## PRODUCT DATA SPECIFICATION

Please note: the below capacities are to be used as a guide and are for reference only.

Denotes Vertical Tambour Unit 

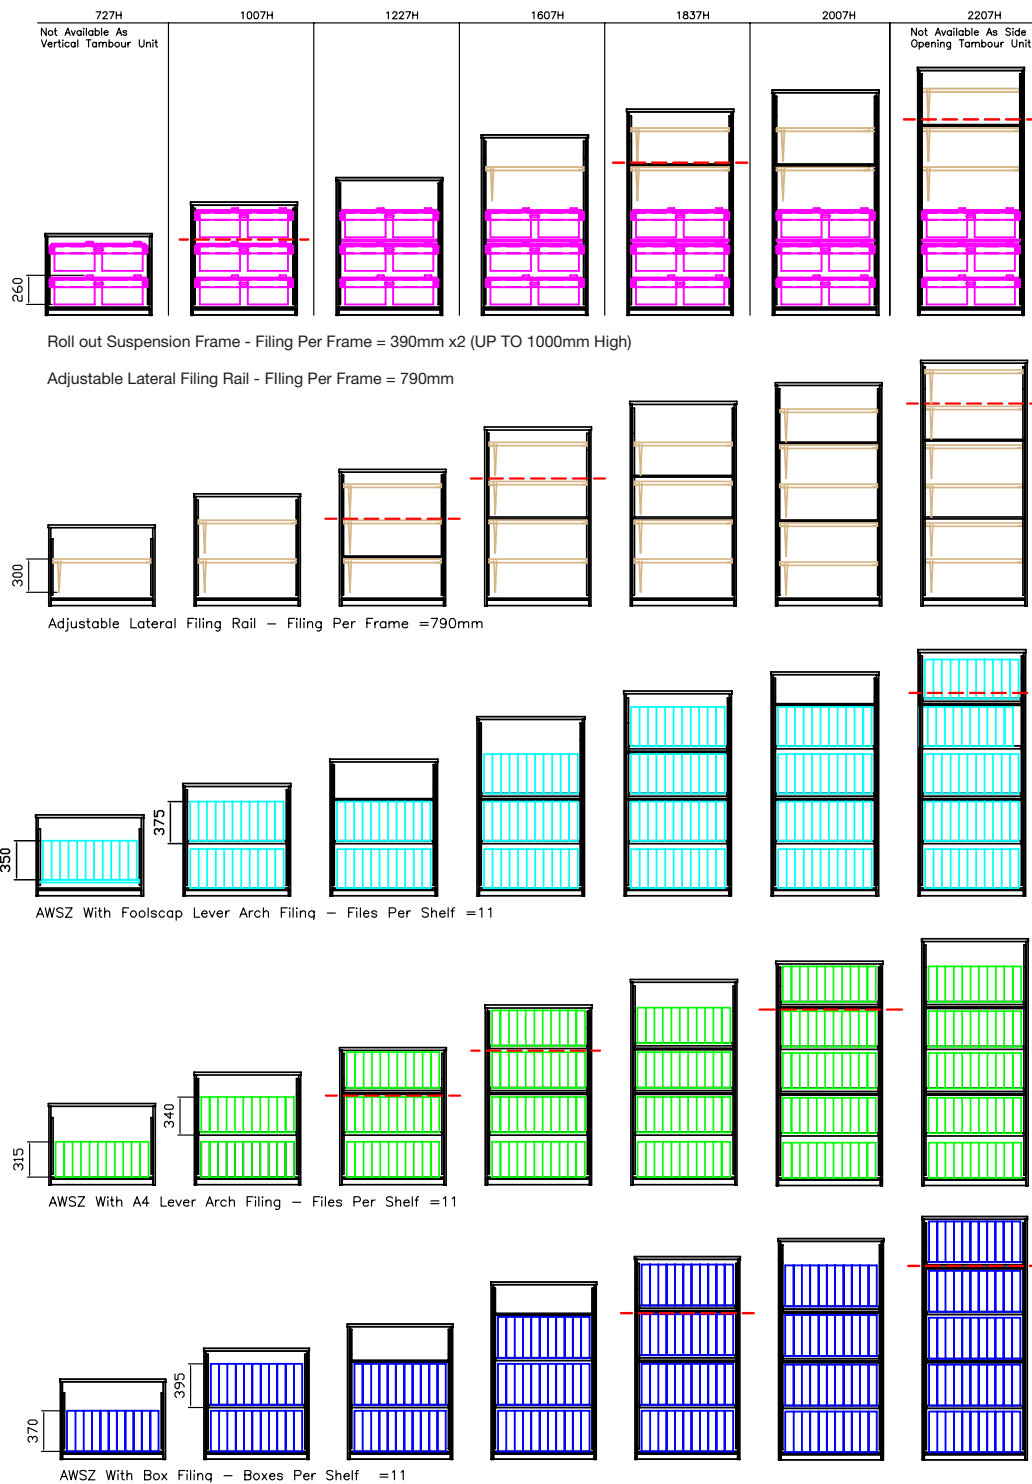

# VERTICAL OPENING TAMBOUR UNITS

## PRODUCT DATA SPECIFICATION

A range of vertical opening tambour units with provision for a range of adjustable accessories.

### Material

Top panel 25mm thick Melamine faced chipboard. Tops are edged all around with 2mm thick impact resistant ABS.

Carcase 18mm thick Melamine faced chipboard edged with 1mm thick impact resistant ABS.

Tambour mat is manufactured from a co-extruded hollow polypropylene section with integral hinge design to give a light weight free running tambour door.

Tambour track and corner profiles are manufactured from ABS plastic.











Tambour handle is manufactured from extruded aluminium.

Ladder track is manufactured from mild steel and allows internal accessories such as shelves to be positioned as required by the end user.


### Considerations

- Offered in a range of heights.
- Optional accessories available including shelves, Filing frames and pull out shelves.
- Units are locking the lock is part of a suited system that has over 250 differs, can be supplied with a master key or can be keyed alike. Supplied with two keys; one of which has a collapsible fob.
- Optional extended tops available to match desks and pedestals.
- Supplied with adjustable feet to allow units to be levelled.


### Accessories

				
CSLF Combi shelf	ROSF Roll out suspension frame	ROD Roll out drawer	ROSD Roll out slotted drawer with 5 dividers	ASM Adjustable slotted metal shelf with 5 dividers
				
ALFR Adjustable lateral filing rail	MROS Metal roll out shelf	AWSZ Adjustable shelf. 25mm thick MFC	AMS Adjustable shelf - Metal	WSHZ Wooden hat shelf & coat rail. 25mm thick MFC

Square edge



Certification



Environment



Quality



100% Recyclable



Surface



Guarantee



Dimensions


For full details see capacities

# VERTICAL OPENING TAMBOUR UNITS

## PRODUCT DATA SPECIFICATION

Please note: the below capacities are to be used as a guide and are for reference only. Units are 950mm wide x 520mm deep.

Denotes Vertical  
Tambour Unit
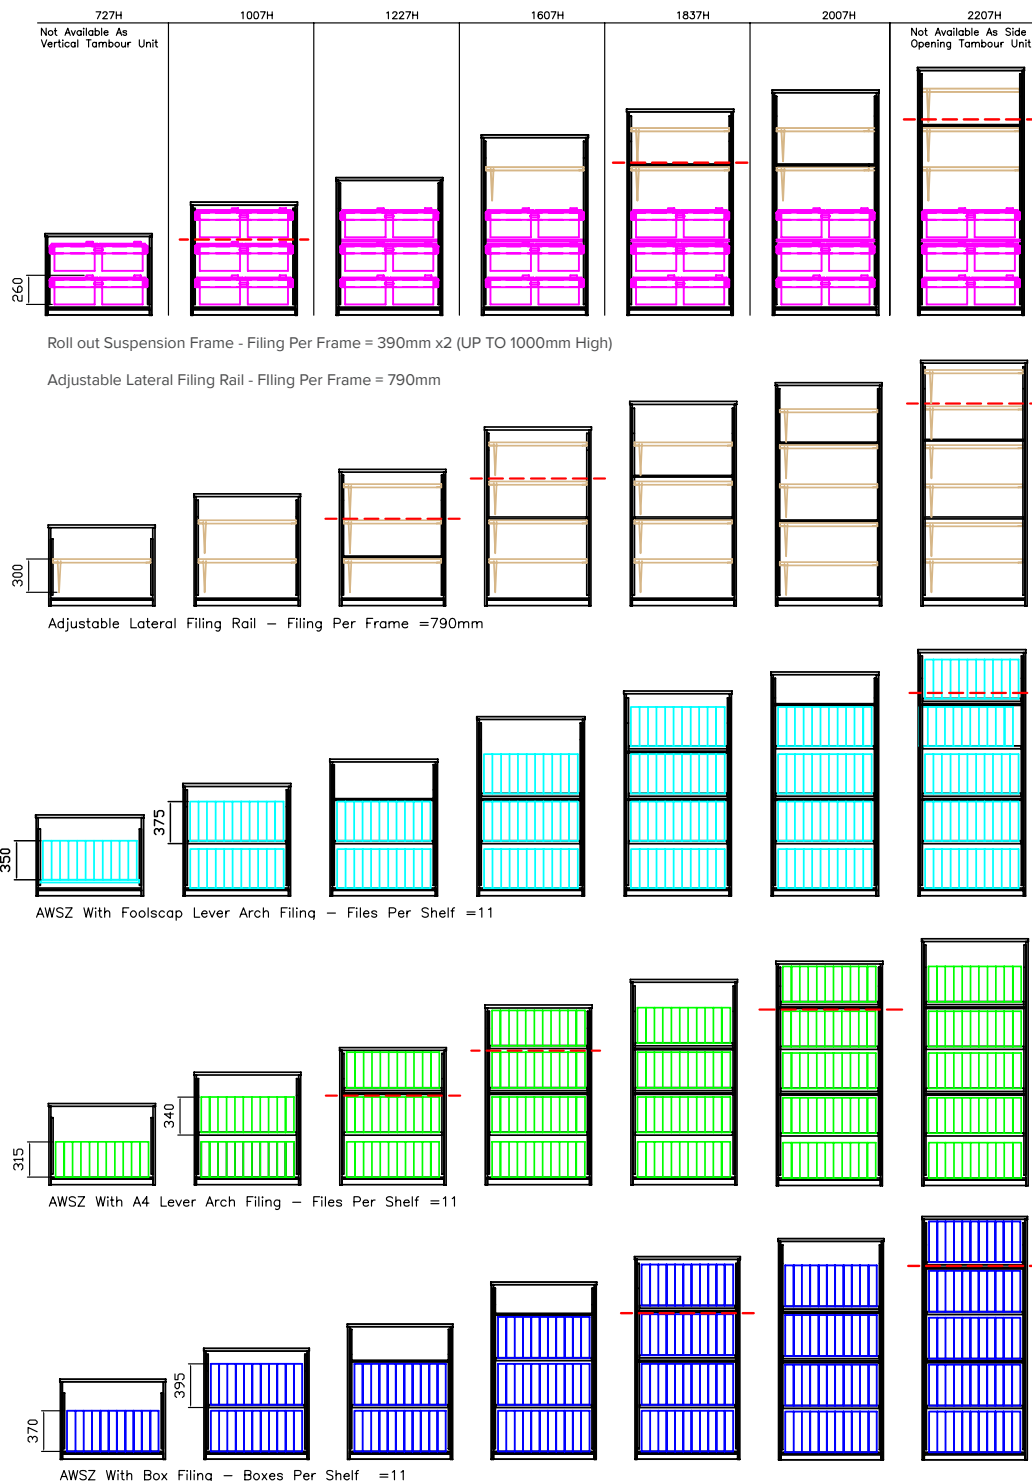
# SIDE OPENING TAMBOUR UNITS

## PRODUCT DATA SPECIFICATION

A range of side opening tambour units with provision for a range of adjustable accessories.

### Material

Top panel 25mm thick Melamine faced chipboard. Tops are edged all around with 2mm thick impact resistant ABS.

Carcase 18mm thick Melamine faced chipboard edged with 1mm thick impact resistant ABS.

Tambour mat is manufactured from a co-extruded hollow polypropylene section with integral hinge design to give a light weight free running tambour door.

Tambour track and corner profiles are manufactured from ABS plastic.











Tambour handle is manufactured from extruded aluminium.

Ladder track is manufactured from mild steel and allows internal accessories such as shelves to be positioned as required by the end user.


### Considerations

- Offered in a range of heights.
- Optional accessories available including shelves, Filing frames and pull out shelves.
- Units are locking the lock is part of a suited system that has over 250 differs, can be supplied with a master key or can be keyed alike. Supplied with two keys; one of which has a collapsible fob.
- Optional extended tops available to match desks and pedestals.
- Supplied with adjustable feet to allow units to be levelled.


### Accessories

				
CSLF Combi shelf	ROSF Roll out suspension frame	ROD Roll out drawer	ROSD Roll out slotted drawer with 5 dividers	ASM Adjustable slotted metal shelf with 5 dividers
				
ALFR Adjustable lateral filing rail	MROS Metal roll out shelf	AWSZ Adjustable shelf. 25mm thick MFC	AMS Adjustable shelf - Metal	WSHZ Wooden hat shelf & coat rail. 25mm thick MFC

Square edge



Certification



Environment



Quality



100% Recyclable



Surface



Guarantee



Dimensions

For full details see capacities

# SIDE OPENING TAMBOUR UNITS

## PRODUCT DATA SPECIFICATION

Please note: the below capacities are to be used as a guide and are for reference only. Units are 1100mm wide x 520mm deep.

Denotes Vertical Tambour Unit ---

